

Bürkert 2000 Series: A Smarter Design

Bürkert Fluid Control Systems
Bürkert Contromatic Australia Pty Ltd

Telephone 1300 888 868
Facsimile 1300 888 076
sales.au@burkert.com
www.burkert.com.au

Bürkert Fluid Control Systems
Bürkert Contromatic New Zealand Ltd

Telephone 0800 BURKERT
Facsimile 0800 33 33 77
sales.nz@burkert.com
www.burkert.co.nz



bürkert
FLUID CONTROL SYSTEMS


The 5 Million⁺ Cycle Valve

The 5 Million+ Cycle Valve

The 2000 Series: Proven Reliability.

Actuator Features	
Diameter Ø	40mm 50mm 63mm 80mm 100mm 125mm
Materials	PA: standard PPS: high ambient & chemical resistant
Function	Normally Open Normally Closed Double Acting

Valve Features	
Valve Body	Gunmetal Stainless Steel 316L
Seal	PTFE: standard Others on request
Port Types	BSP Threaded Weld End Flanged
Function	2/2 Way 3/2 Way (Gunmetal only)
Diameter	Orifice 13 to 65mm BSP Ports 3/8" to 2 1/2"
Flow	3.7 m³/h to 90 m³/h (approx)

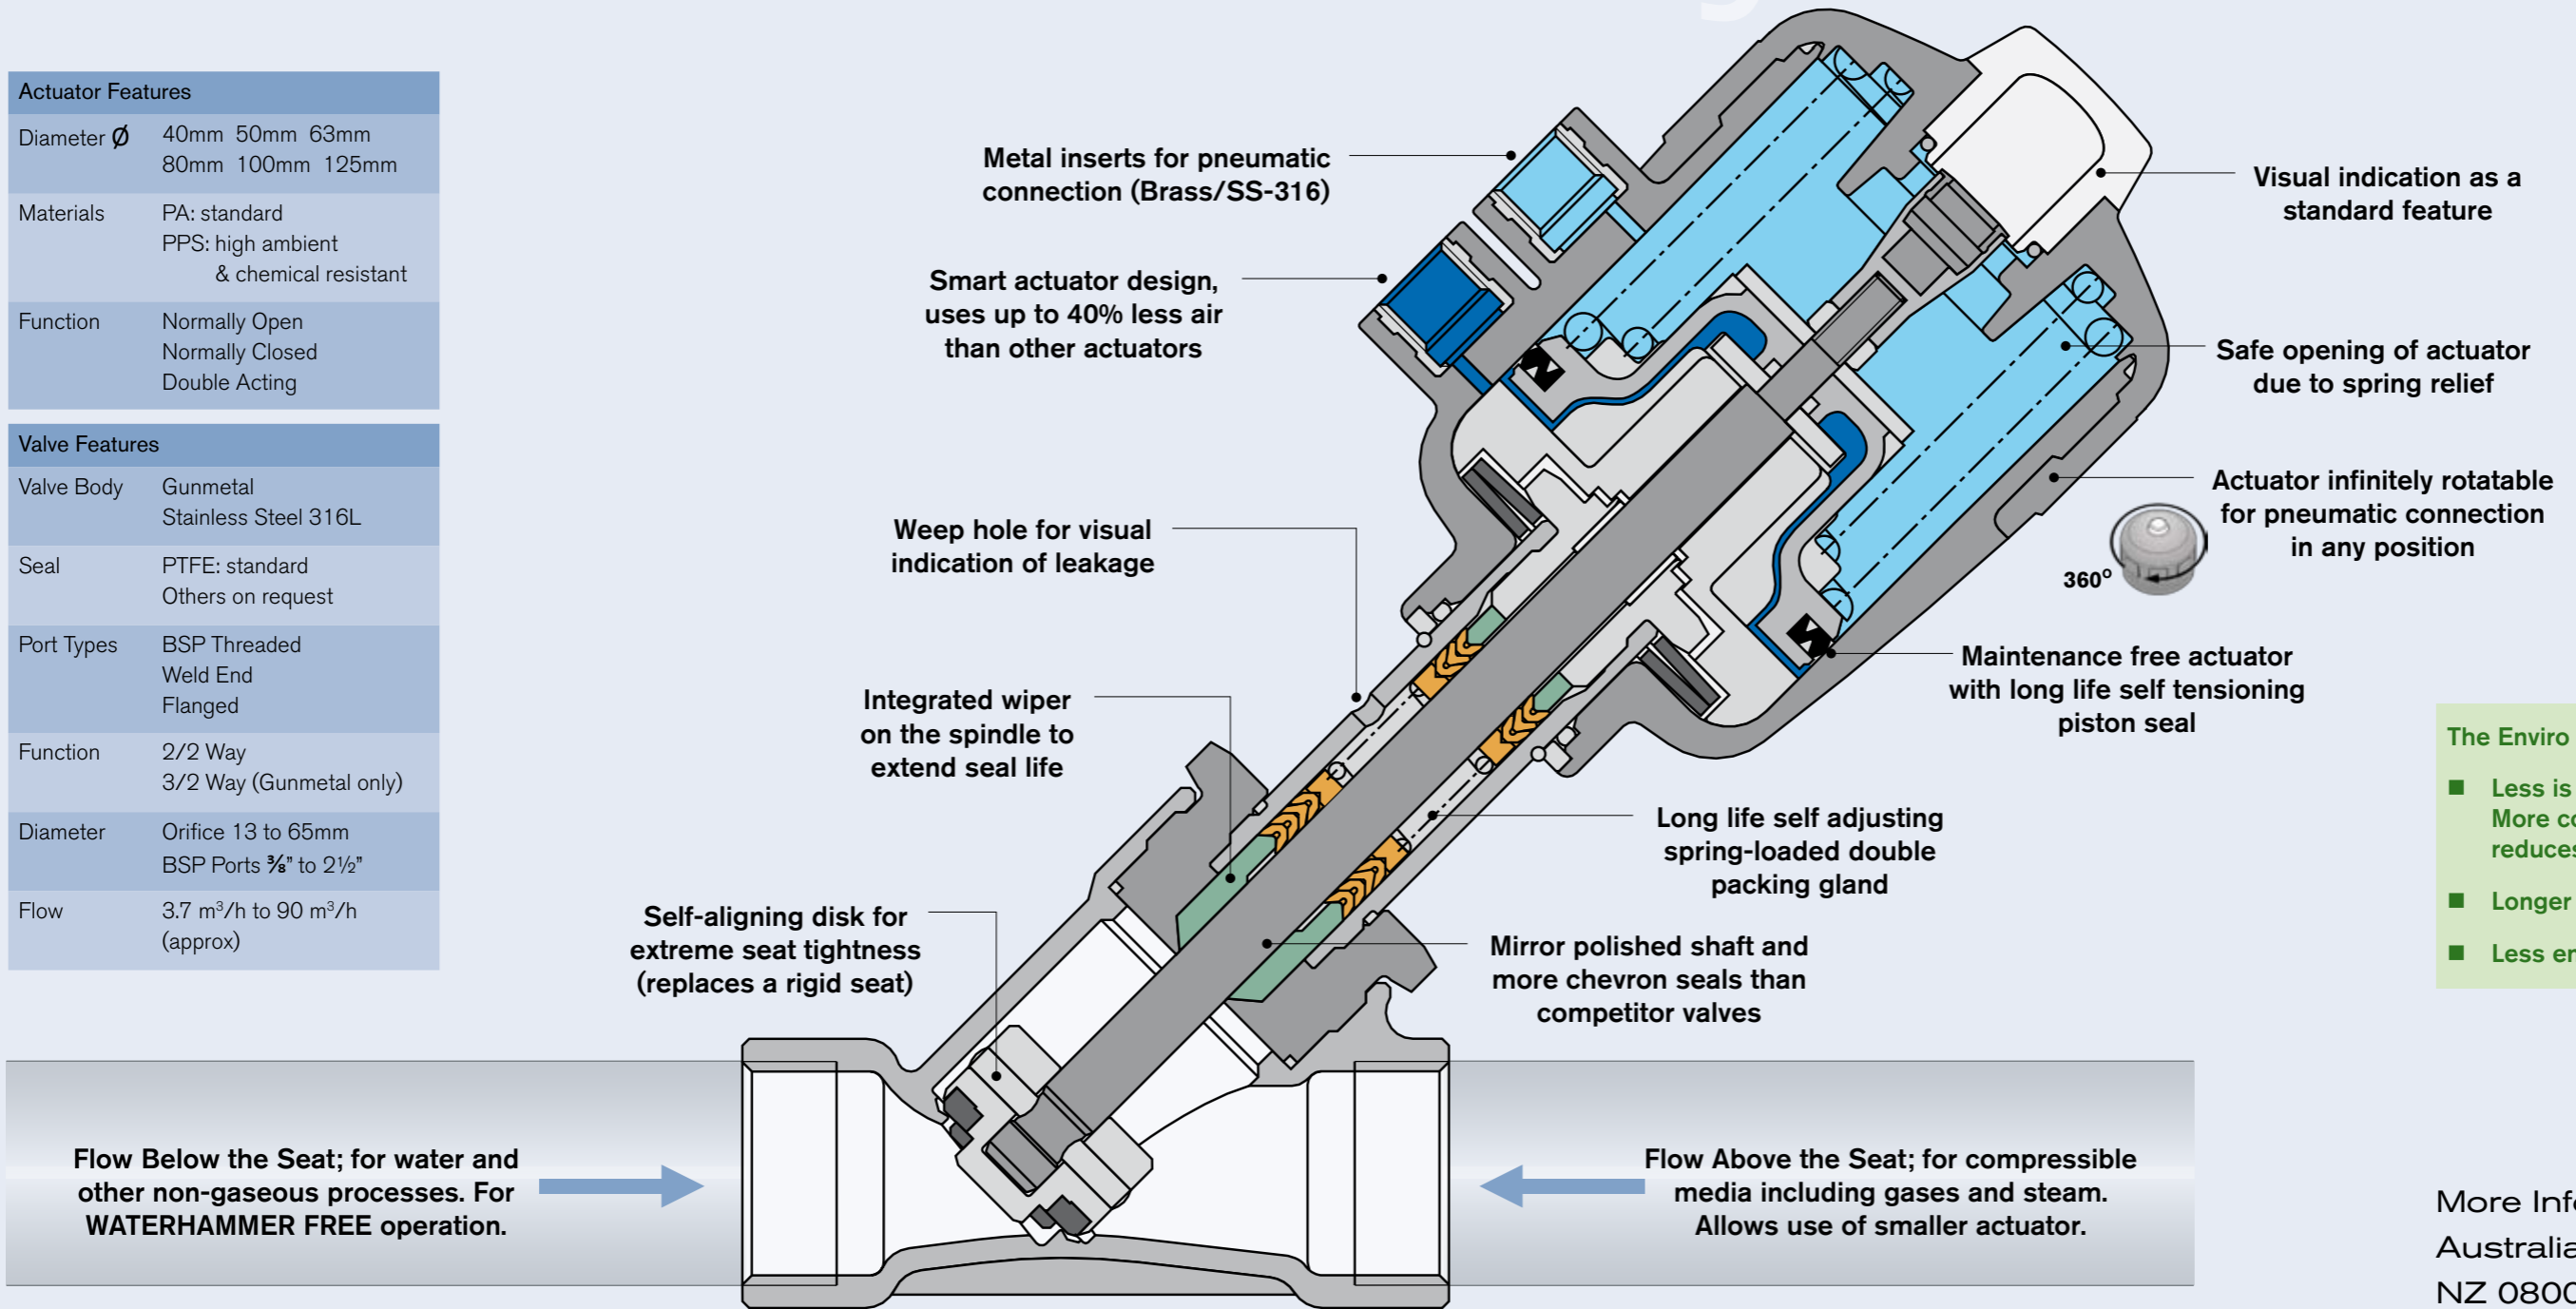

The Enviro Choice Valve 

- Less is more .. More compact & efficient design reduces the carbon footprint.
- Longer service life: up to 600%
- Less energy input: up to 40%

More Info:
Australia 1300 888 868
NZ 0800 BURKERT [287 537]

